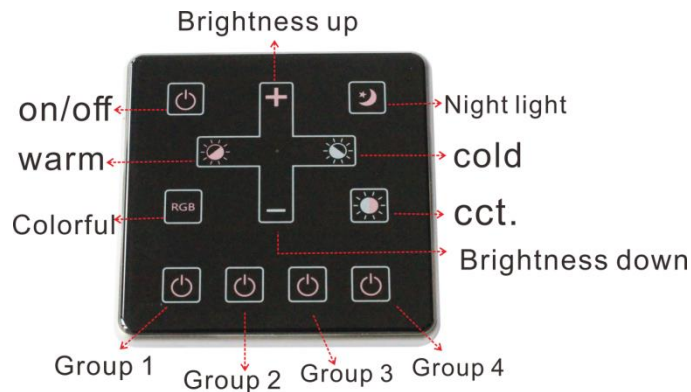# Q2-12J wireless panel instruction

1. Keynote Instruction

2. Matching

A. Switch off the power, then switch on power again, short press the ON/OFF key 3 times on the panel quickly within 5s after Lighting power on. The link is successful when the light flash 3 times.

3. Deleting

4. Switch off the power,Long press the "on/off"key about 6s ,(Hold on your hands on the key don't move until the light flash 3 times) then switch on power again, the unlink is done once the light blinks 3 times.

5. Group matching

A. Switch off the power, then switch on power again, short press one of the GROUP keys 3 times on the panel quickly within 5s after Lighting power on. The Group matching is successful when the light flash 3 times.

6. Group deleting

7. Switch off the power,Long press the "Group"key for which you want about 6s ,(Hold on your

hands on the key don't move until the light flash 3 times) then switch on power again, the unlink is done once the light blinks 3 times.

8. RGB

9. Click the "RGB" key, the colorful gradient. Long press the "RGB" key, the lights sync to red.

10. CCT changing

A. Click the "CCT" key,it's will be 3000k 4000k 6000k.

11. Group control

A. In group 1-4, first press the identity number of a group of lights to be controlled, such as group 3, and then press 3 to change to group 3.

Product parameters

Product type: Q2-RGB   product size: 86*88*7mm
Way of power supply: CR2032 button cell
Standby time: About 6000 hours
Control distance: ≤50m   RF Frequency band: 2.4 GHz-2.483 GHz